



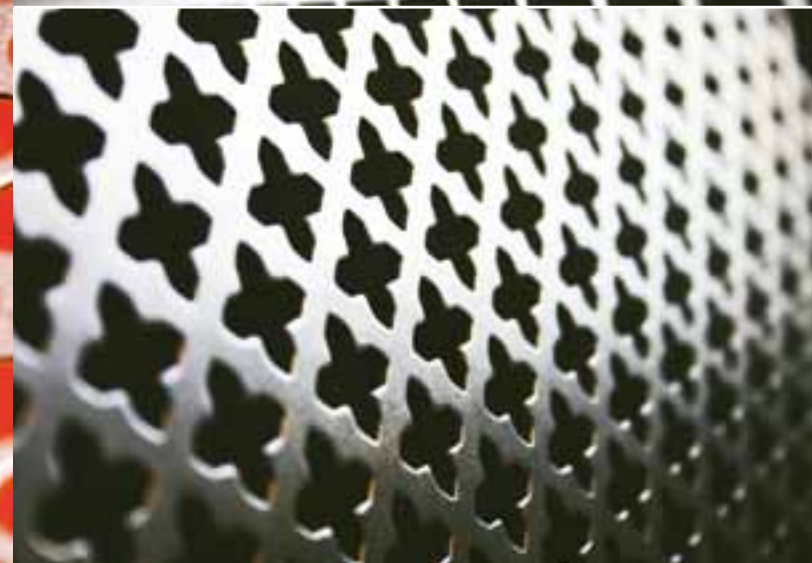

Perforated Stock Sheets - 2010

ORDER NOW FOR
IMMEDIATE DELIVERY

CALL 01925 839644 or VISIT www.rmig.com

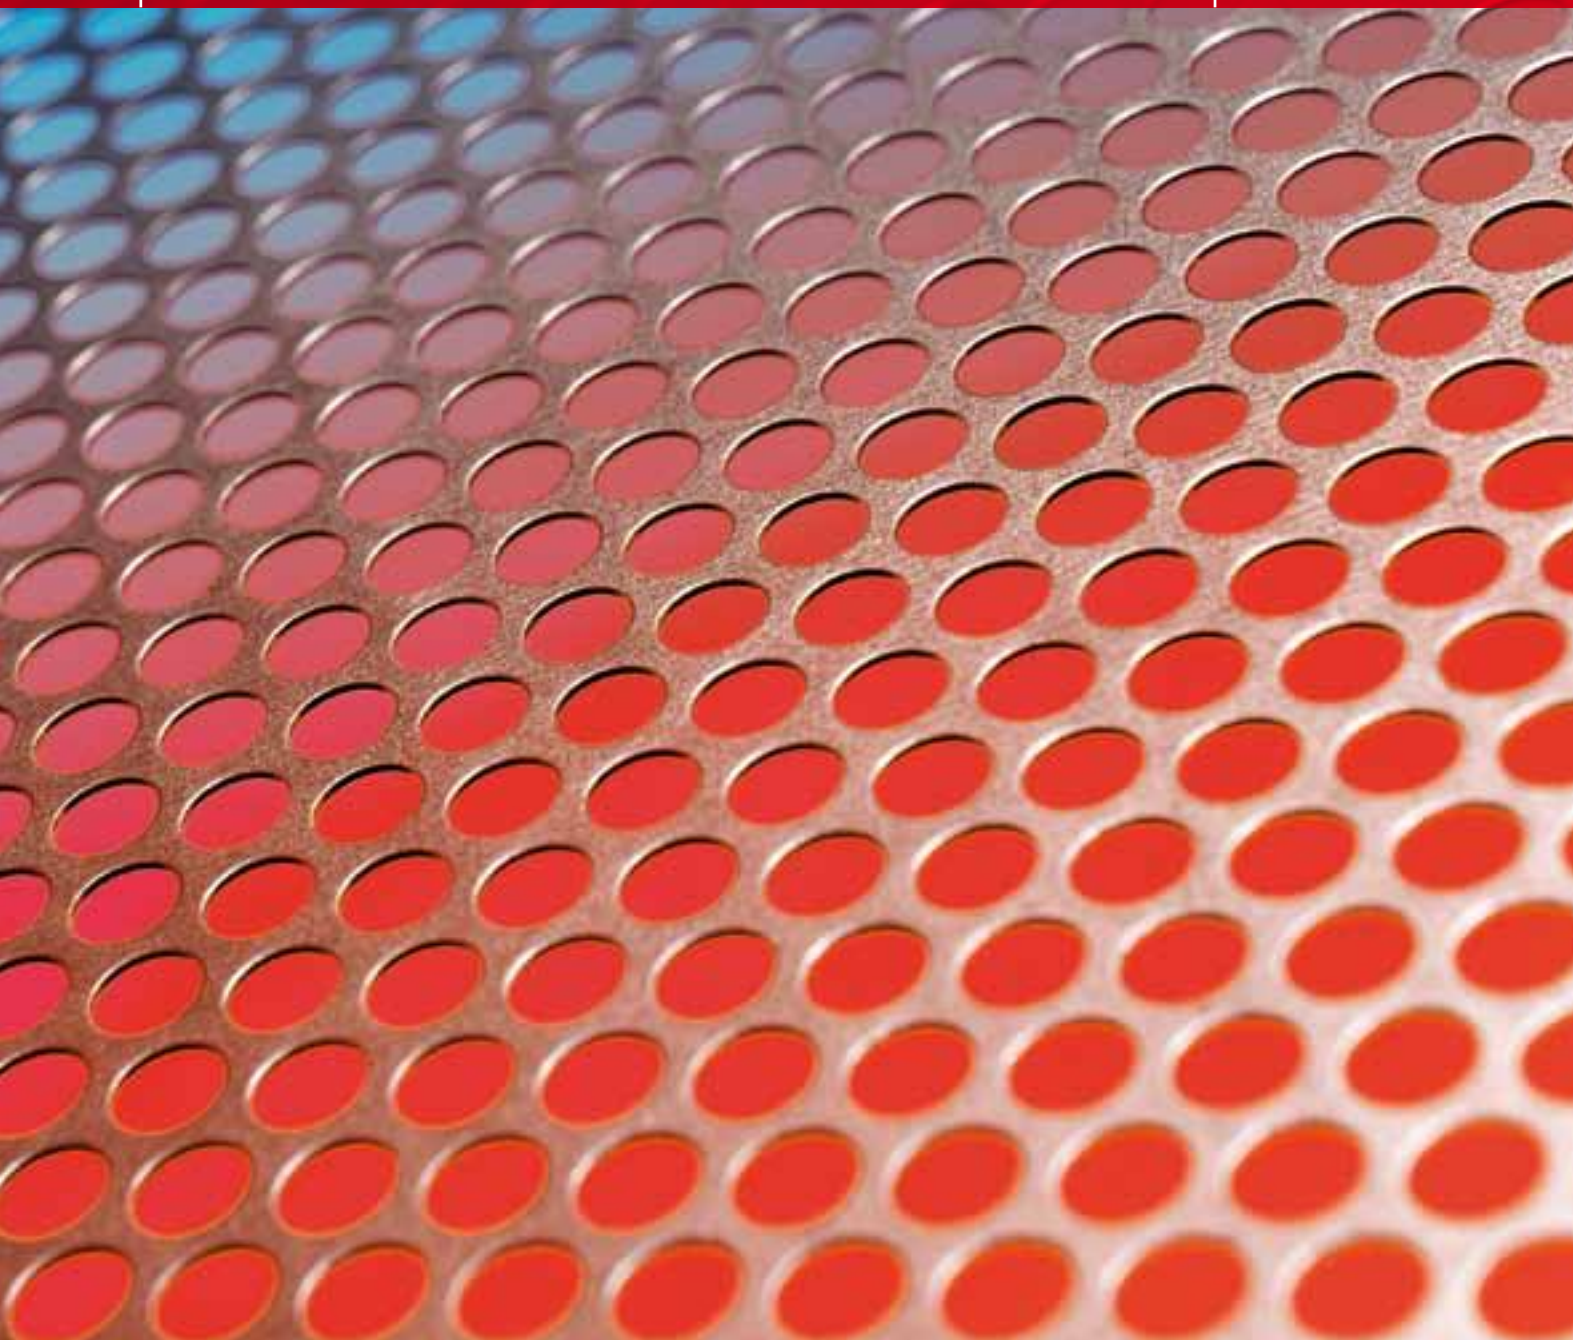

● SAVE £££ ● 500 + STOCK PRODUCTS ● TRADE PRICES ● 24/48 HR DELIVERY

Welcome to RMIG the UK's leading supplier of perforated stock sheets, available off the shelf for immediate delivery.

Stock Range

Whatever your requirements we have the most extensive range of high quality perforated sheets in a variety of materials, available today.

As the largest manufacturer of perforated metal in the world, we keep a wide range of stock at our warehouse in Warrington which we can deliver on a next day service if required.

An extended range is also available from our sister companies across Europe for delivery direct to your door in 7 / 10 days.

There are over 650 pattern specifications available in Mild Steel, Pre Galvanised and Aluminium, as well as St304, St316 and also St304 Polished. All are available in various stock sheet sizes including: 2000x1000mm, 2500x1250mm and 3000x1500mm.

This brochure indicates our extensive range of options. Please call our friendly dedicated team who will help with your enquiries, no matter how complex or difficult your application needs may be.

We do not have a minimum order charge and all our prices are inclusive of delivery within the UK. We also accept all major credit and debit cards to allow ease of ordering and immediate despatch.

You can also find additional information by visiting our website www.rmig.com

RMIG is the world's largest manufacturer and supplier of perforated metal, with manufacturing units and sales offices throughout Europe.

The UK is served from our manufacturing and sales office based in Warrington from where we supply stock sheets and tailor made products.

Stock sheets

We hold in stock an extensive range of perforated sheets in a variety of hole configurations, normally delivered on a next day basis.

Tailor made

As the name suggests, we manufacture to customer specific requirements and offer not only a perforating facility but also a total solution in terms of fabrication and finishing options.

Contact us

via our website www.rmig.com
or email info.uk@rmig.com
or phone our direct sales line
01925 839644

Opening hours

| | |
|--------------------|-------------|
| Monday to Thursday | 8.00 – 5.30 |
| Friday | 8.00 – 4.30 |

RMIG

Formerly Rich. Muller Limited

Quality Products

As a group we are committed to providing you with a quality product and excellent customer service .

Stock Lines

We stock an extensive range of materials with different hole configurations within our group .

Fast Delivery

Local stock delivery within 24/48 hours
Group stock within 7/10 working days.

Easy Ways To Order

Contact us by phone **01925 839644**
or visit our website at www.rmig.com



CALL
01925 839644

VISIT
www.rmig.com



RM Stock list 2010A

- = 1 day delivery
- ▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | |
|---------------------------------------|---------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | |
| Round holes Triangular pitch | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | |
| R 0.50 | T 1.09 | 19.1% | | ● | | | | | | | | | | | | | | | | |
| R 0.75 | T 1.50 | 22.7% | | | | | ● | | | | | | | | | | | | | |
| R 1.00 | T 2.00 | 22.7% | | ▲ | | ▲ | ● | | ● | | | | | | | | | | | |
| R 1.10 | T 2.00 | 27.4% | | | | | | ● | | | | | | | | | | | | |
| R 1.25 | T 2.40 | 24.6% | | | | | ▲ | | ● | | | | | | | | | | | |
| R 1.50 | T 2.50 | 33.0% | | | | | ▲ | | ▲ | | | ▲ | | | | | | | | |
| R 1.50 | T 2.60 | 30.2% | | | | ▲ | ● | | ● | | | | | | | | | | | |
| R 1.50 | T 3.00 | 22.7% | | | | | | ● | | | | ● | | | | | | | | |
| R 1.75 | T 3.00 | 31.0% | | | | | | | | | | ● | | | | | | | | |
| R 2.00 | T 3.00 | 40.3% | | | | | ▲ | | ● | ● | | ● | ▲ | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | ▲ | | ▲ | ▲ | | ● | | | ▲ | ● | | | | | | | |
| R 2.00 | T 4.00 | 22.7% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| R 2.50 | T 3.50 | 46.3% | | | | | | ▲ | | | | ▲ | | ▲ | | | | | | |
| R 2.50 | T 3.62 | 27.7% | | | | | | | | | | | ▲ | | | | | | | |
| R 2.50 | T 4.00 | 35.4% | | | | | | ▲ | | | | ● | ▲ | | | | | | | |
| R 2.75 | T 4.50 | 34.0% | | | | | | | | | | | ▲ | | | | | | | |
| R 3.00 | T 4.00 | 51.0% | | | | | | ▲ | ● | | ● | | | | ▲ | | | | | |
| R 3.00 | T 4.50 | 40.3% | | | | | | ▲ | | | ▲ | ▲ | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | ▲ | | ▲ | ▲ | | ● | | ● | ● | | ● | | | | | | |
| R 3.00 | T 6.00 | 22.7% | | | | | | ▲ | | | ▲ | | | ▲ | | | | | | |
| R 3.25 | T 5.25 | 34.8% | | | | | | | | | | | ▲ | | | | | | | |
| R 3.50 | T 5.00 | 44.4% | | | | | | ▲ | | | | ▲ | ▲ | | ▲ | | | | | |
| R 3.50 | T 5.50 | 37.0% | | | | | | | | | | ▲ | | ▲ | | | | | | |
| R 4.00 | T 5.00 | 58.0% | | | | | | ▲ | | | ● | | | | | | | | | |
| R 4.00 | T 5.25 | 52.6% | | | | | | | | | | ▲ | | ▲ | | | | | | |
| R 4.00 | T 5.60 | 46.0% | | | | | | ▲ | | | | | | ▲ | | ▲ | | | | |
| R 4.00 | T 6.00 | 40.3% | | ▲ | | | | ● | | | ● | ▲ | | ▲ | ▲ | | | | | |
| R 4.00 | T 7.00 | 29.6% | | | | | | ▲ | | | ▲ | ▲ | | ▲ | | | | | | |
| R 4.00 | T 8.00 | 23.0% | | | | | | | | | | ▲ | ▲ | | | ▲ | | | | |
| R 4.50 | T 7.00 | 38.0% | | | | | | | | | | ▲ | | | | | | | | |
| R 5.00 | T 6.50 | 54.0% | | | | | | ▲ | | | | | | | | | | | | |
| R 5.00 | T 7.00 | 46.3% | | ▲ | | | | | | | ▲ | ▲ | | | ▲ | | | | | |
| R 5.00 | T 7.50 | 40.3% | | | | | | ● | | | ● | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | ▲ | ▲ | ▲ | | ▲ | ● | | ● | ▲ | | ▲ | | | |
| R 5.00 | T 10.00 | 22.7% | | | | | | | | | | | | | | | | | ▲ | |
| R 6.00 | T 7.20 | 63.2% | | | | | | ▲ | | | | | | | | | | | ▲ | |
| R 6.00 | T 8.00 | 51.0% | | | | | | ● | | | ● | ▲ | | ▲ | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | ▲ | | | | ▲ | | | ● | ● | | ● | ▲ | | ▲ | | ▲ | |
| R 6.00 | T 12.00 | 22.7% | | | | | | | | | | | | | | | | | ▲ | |
| R 7.00 | T 10.00 | 44.4% | | | | | | ▲ | | | ▲ | ▲ | | ▲ | | | | | | |
| R 8.00 | T 10.00 | 58.0% | | | | | | ● | | | ● | | | | | | | | | |
| R 8.00 | T 11.00 | 48.0% | | | | | ▲ | | ▲ | | ▲ | ▲ | | ▲ | ▲ | | | | | |
| R 8.00 | T 12.00 | 40.3% | | | | | | ▲ | | | ▲ | ▲ | | ▲ | ▲ | | | ▲ | ▲ | |
| R 8.00 | T 15.00 | 26.0% | | | | | | | | | | | | | | | | | | ▲ |
| R 9.00 | T 12.00 | 51.0% | | | | | | | | | | | ▲ | | | | | | | |
| R 10.00 | T 12.70 | 56.2% | | | | | | ● | | | ● | ▲ | | | | | | | | |
| R 10.00 | T 14.00 | 46.3% | | | | | | ▲ | | | ▲ | ▲ | | ▲ | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | ▲ | ▲ | | ● | ▲ | | ● | ▲ | | | ▲ | ▲ | |
| R 10.00 | T 16.00 | 35.0% | | | | | | | | | | | | | | | | | | ▲ |
| R 11.00 | T 14.50 | 52.0% | | | | | | ▲ | | | | | | | | | | | | ▲ |
| R 12.00 | T 15.55 | 54.0% | | | | | | ▲ | | | | | | | | | | | | |
| R 12.00 | T 16.00 | 51.0% | | | | | | ▲ | | | ● | ▲ | | ▲ | | | | | ▲ | |
| R 12.00 | T 17.00 | 45.2% | | | | | | | | | ▲ | ▲ | | ▲ | | | | | | |
| R 12.00 | T 18.00 | 40.3% | | | | | | | | | | | | | ▲ | | | ▲ | | ▲ |
| R 14.00 | T 16.50 | 65.0% | | | | | | | | | | | | | | | | | | |
| R 15.00 | T 19.00 | 56.5% | | | | | | | | | | ▲ | ▲ | | | | | | | |
| R 15.00 | T 20.00 | 51.0% | | | | | | ▲ | | | | ▲ | | ▲ | | | | | | |
| R 15.00 | T 21.00 | 46.0% | | | | | | ▲ | | | | ▲ | | | | | | | ▲ | |
| R 15.00 | T 22.00 | 42.2% | | | | | | ▲ | | | | ▲ | ▲ | | ▲ | | | ▲ | | |
| R 15.00 | T 24.70 | 33.0% | | | | | | | | | | | | | | | | | | ▲ |
| R 18.00 | T 25.00 | 47.0% | | | | | | | | | | | | | | | | | | |
| R 20.00 | T 27.00 | 49.8% | | | | | | | ▲ | | | ▲ | ▲ | | ▲ | ▲ | | ▲ | ▲ | |
| R 20.00 | T 28.00 | 46.3% | | | | | | | | | | ● | | ● | ▲ | | | ▲ | | |
| R 20.00 | T 30.00 | 40.3% | | | | | | | | | | ▲ | | ▲ | | | | | | |
| R 25.00 | T 35.00 | 46.3% | | | | | | | | | | | ▲ | | | | | | | |
| R 30.00 | T 40.00 | 51.0% | | | | | | | | | | | | ▲ | | | | | | |
| Senzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | |
| R 1.50 | T 2.60 | 30.2% | | | | | | | ▲ | | | ▲ | | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| R 3.00 | T 4.00 | 51.0% | | | | | | ▲ | | | | | | | | | | | | |
| R 3.00 | T 4.50 | 40.3% | | | | | | ▲ | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | ▲ | ▲ | ▲ | ▲ | | ● | | ● | ▲ | | | | | | | | |
| R 3.00 | T 6.00 | 22.7% | | ▲ | | | | ▲ | | | | | | | | | | | | |
| R 4.00 | T 6.00 | 40.3% | | | | | | ▲ | | | | | | | | | | | | |
| R 4.00 | T 7.00 | 29.6% | | ▲ | | | | ▲ | ▲ | | | ▲ | | | | | | | | |
| R 5.00 | T 6.50 | 54.0% | | | | | ▲ | | ▲ | | | | | | | | | | | |
| R 5.00 | T 7.00 | 46.3% | | | | | ▲ | ▲ | ▲ | | | ▲ | ▲ | | | | | | | |
| R 5.00 | T 7.50 | 40.3% | | | ▲ | ▲ | | ● | | | ● | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | ▲ | ▲ | | | ▲ | ▲ | | | | | | | | |



RM Stock list 2010A

● = 1 day delivery
▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | | |
|---|------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Round holes Triangular pitch | | | | | | | | | | | | | | | | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 8.00 | T 11.00 | 48.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| R 8.00 | T 12.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 10.00 | T 14.00 | 46.3% | | | | | | | | | | | | ▲ | | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | ● | | |
| R 15.00 | T 21.00 | 46.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| R 20.00 | T 28.00 | 46.3% | | | | | | | | | | | | | ▲ | | | | | | |
| Aluminium EN 5754 (AlMg3) | | | | | | | | | | | | | | | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | | | | | | ▲ | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | ▲ | | | ▲ | | | | | ▲ | | | | | | | |
| R 4.00 | T 6.00 | 40.3% | | | | | | | ▲ | | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | ▲ | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | | | | | | | ▲ | | | | | | |
| R 8.00 | T 15.00 | 26.0% | | | | | | | | | | | | | | | | | ▲ | ▲ | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | | | | | | | ▲ | | | | | | |
| Dimension: 1000 x coil mm | | | | | | | | | | | | | | | | | | | | | |
| Round holes Triangular pitch | | | | | | | | | | | | | | | | | | | | | |
| Stainless steel EN 1.4404 (AISI 316L) | | | | | | | | | | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | ▲ | | | | | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | ▲ | | | | | | | | | | | | | | | |
| Dimension: 1250 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Round holes Triangular pitch | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| R 1.00 | T 2.00 | 22.7% | | | | | | | ▲ | | | | | | | | | | | | |
| R 1.50 | T 3.00 | 22.7% | | | | | | | ▲ | | | | | | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 3.00 | T 4.00 | 51.0% | | | | | | | ▲ | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | | | | ● | | | | | ● | ▲ | | | | | | |
| R 4.00 | T 6.00 | 40.3% | | | | | | | ▲ | | | | | | ▲ | | | | ● | | |
| R 5.00 | T 7.50 | 40.3% | | | | | | | | | | | | ● | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | | | ● | | | | | ▲ | ▲ | | | | ● | | |
| R 6.00 | T 8.00 | 51.0% | | | | | | | | | | | | ▲ | | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | ▲ | ● | | | | ● | ▲ | | | | ● | | |
| R 8.00 | T 11.00 | 48.0% | | | | | | | | | | | | ● | ● | | | | | | |
| R 8.00 | T 12.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | ▲ | | |
| R 10.00 | T 14.00 | 46.3% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | ▲ | | | | | ● | ▲ | | | | ● | | |
| R 10.00 | T 16.00 | 35.0% | | | | | | | | | | | | | | | | | | | |
| R 12.00 | T 16.00 | 51.0% | | | | | | | | | | | | ▲ | | | | | | ▲ | |
| R 15.00 | T 21.00 | 46.0% | | | | | | | | | | | | | ▲ | | | | | | |
| R 15.00 | T 22.00 | 42.2% | | | | | | | | | | | | | ▲ | | | | | | |
| R 20.00 | T 27.00 | 49.8% | | | | | | | | | | | | | ▲ | | | | | | |
| R 20.00 | T 28.00 | 46.3% | | | | | | | | | | | | | ● | | | | | | |
| R 30.00 | T 40.00 | 51.0% | | | | | | | | | | | | | ● | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | | | ▲ | | | ▲ | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | ▲ | ▲ | | ● | | | | | ● | | | | | | | |
| R 4.00 | T 6.00 | 40.3% | | | | | | | ▲ | | | | | | | | | | | | |
| R 5.00 | T 7.00 | 46.3% | | | | ▲ | | ▲ | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 5.00 | T 7.50 | 40.3% | | | | | | | ● | | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | ▲ | | ▲ | ▲ | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 6.00 | T 8.00 | 51.0% | | | | | | | ▲ | | | | | | ● | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | | | | | | ● | | | | | | | |
| R 8.00 | T 10.00 | 58.0% | | | | ▲ | | | ▲ | | | | | ▲ | | | | | | | |
| R 8.00 | T 12.00 | 40.3% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| R 10.00 | T 14.00 | 46.3% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | ▲ | | | | | ● | ▲ | | | | | | |
| R 20.00 | T 27.00 | 49.8% | | | | | | | | | | | | | ▲ | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| R 1.50 | T 2.60 | 30.2% | | | | | | | ▲ | | | | | | | | | | | | |
| R 2.00 | T 3.50 | 29.6% | | | | | | | ▲ | | | | | ▲ | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | ● | | | ● | ● | | | | ● | ▲ | | | | | | |
| R 4.00 | T 6.00 | 40.3% | | | | | | | ▲ | | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | | | | | | ● | | | | | | | |
| R 8.00 | T 12.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | ● | | |
| R 20.00 | T 28.00 | 46.3% | | | | | | | | | | | | | ● | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 1 side polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | | | | | | | | ▲ | | | | | | | |
| R 10.00 | T 15.00 | 40.3% | | | | | | | | | | | | ▲ | | | | | | | |
| Stainless steel EN 1.4404 (AISI 316L) | | | | | | | | | | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | | | | ● | ● | | | | ● | | | | | ● | | |
| R 5.00 | T 7.50 | 40.3% | | | | | | | ▲ | | | | | | | | | | | | |
| R 6.00 | T 9.00 | 40.3% | | | | | | | | | | | | ● | | | | | | | |
| Aluminium EN 1050A (2S) | | | | | | | | | | | | | | | | | | | | | |
| R 3.00 | T 5.00 | 32.7% | | | | | | | ● | | | | | ▲ | ▲ | | | | | | |
| R 5.00 | T 7.50 | 40.3% | | | | | | | ● | ● | | | | | | | | | | | |
| R 5.00 | T 8.00 | 35.4% | | | | | | | ▲ | | | | | ▲ | ▲ | | | | ▲ | | |



RM Stock list 2010A

● = 1 day delivery
▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | | |
|--|------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Dimension: 1250 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Round holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| R 4.50 | U 15.00 | 7.1% | | | | | | | ▲ | | | | ▲ | | | | | | | | |
| R 10.00 | U 20.78 | 18.2% | | | | | | | | | | | ▲ | | | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| R 4.50 | U 15.00 | 7.1% | | | | | | | | | | | ▲ | | | | | | | | |
| Aluminium EN 1050A (2S) | | | | | | | | | | | | | | | | | | | | | |
| R 4.50 | U 15.00 | 7.1% | | | | | | | | | | | ▲ | | | | | | | | |
| R 10.00 | U 20.78 | 18.2% | | | | | | | | | | | | ▲ | | | | | | | |
| R 10.00 | U 25.98 | 11.6% | | | | | | | | | | | | | ▲ | | | | | | |
| Aluminium EN 1050A (2S) + PVC | | | | | | | | | | | | | | | | | | | | | |
| R 20.00 | U 48.50 | 15.4% | | | | | | | | | | | | | ▲ | | | | | | |
| Dimension: 1500 x 3000 mm | | | | | | | | | | | | | | | | | | | | | |
| Round holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| R 4.50 | U 15.00 | 7.1% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Square holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| C 4.00 | U 6.38 | 40.0% | | | | | | | ▲ | | | | | | | | | | | | |
| C 4.00 | U 7.00 | 32.7% | | | | | | | ▲ | | | | ▲ | | | | | | | | |
| C 5.00 | U 7.00 | 51.0% | | | | | | ▲ | ▲ | | | | ▲ | | | | | | | | |
| C 5.00 | U 7.50 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 5.00 | U 16.00 | 9.8% | | | | | | | ▲ | | | | | | | | | | | | |
| C 5.50 | U 8.00 | 47.3% | | | | | | | ▲ | | | | | | | | | | | | |
| C 6.00 | U 9.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 6.00 | U 10.00 | 36.0% | | | | | | | ▲ | | | | | | | | | | | | |
| C 7.00 | U 10.00 | 49.0% | | | | | | | ▲ | | | | ▲ | | | | | | | | |
| C 8.00 | U 10.00 | 64.0% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 9.00 | U 34.00 | 7.0% | | | | | | | | | | | ▲ | ▲ | | | | | | | |
| C 9.20 | U 34.00 | 7.0% | | | | | | | | | | | ▲ | ▲ | | | | | | | |
| C 9.20 | U 38.00 | 6.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | | ▲ | | | | ● | ▲ | | | ▲ | | | | |
| C 10.00 | U 12.00 | 69.4% | | ▲ | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 13.00 | 59.2% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | ▲ | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | ▲ | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 15.00 | U 20.00 | 56.3% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | ▲ | | |
| C 20.00 | U 25.00 | 64.0% | | | | | | | | | | | | ▲ | | | | | | | |
| C 20.00 | U 40.00 | 25.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| C 25.00 | U 30.00 | 69.4% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| C 30.00 | U 60.00 | 25.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| C 40.00 | U 80.00 | 25.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 7.00 | 51.0% | | | | | | | | | | | | ▲ | | | | | | | |
| C 5.00 | U 7.50 | 44.4% | | | | | | | ▲ | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 5.50 | U 8.00 | 47.3% | | | | | | | ▲ | | | | | | | | | | | | |
| C 8.00 | U 10.00 | 64.0% | | | | | | | ● | | | | ● | ▲ | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | ▲ | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| Hot dip galvanised | | | | | | | | | | | | | | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 7.50 | 44.4% | | | | | | | ▲ | | | | ● | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 8.00 | U 10.00 | 64.0% | | | | | | | ▲ | | | | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 8.00 | U 24.00 | 11.1% | | | | | | | | | | | ▲ | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | ▲ | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | ▲ | | | | ● | ▲ | | | | | | | |
| C 15.00 | U 40.00 | 14.1% | | | | | | | | | | | ▲ | | | | | | | | |
| C 20.00 | U 50.00 | 16.0% | | | | | | | | | | | ▲ | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 1 side polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 16.00 | 9.8% | | | | | | | | | | | | ▲ | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | | | ▲ | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 2 sides polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 16.00 | 9.8% | | | | | | | | | | | | ▲ | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | | | ▲ | | | | | | | |



RM Stock list 2010A

- = 1 day delivery
- ▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | | |
|--|------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Square holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| C 15.00 | U 40.00 | 14.1% | | | | | | | | | ▲ | | | | | | | | | | |
| C 20.00 | U 50.00 | 16.0% | | | | | | | | | ▲ | | | | | | | | | | |
| Stainless steel EN 1.4404 (AISI 316L) | | | | | | | | | | | | | | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | ▲ | | | | | | | | | | | | | |
| Aluminium EN 1050A (2S) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 7.00 | 51.0% | | | | | | | | | ▲ | | | | | | | | | | |
| C 5.00 | U 7.50 | 44.4% | | | | | | ▲ | | | ▲ | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | ▲ | | | ▲ | ▲ | | | | | | | | | |
| C 6.00 | U 9.00 | 44.4% | | | | | | | | | | ▲ | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | ▲ | | | | | | | | | | | | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | | | | | | ▲ | | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | ▲ | | | | | ▲ | ▲ | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| Aluminium EN 1050A (2S) + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 8.00 | U 24.00 | 11.1% | | | | | | | | | | | ▲ | | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | | ▲ | | | | | | | | |
| C 20.00 | U 50.00 | 16.0% | | | | | | | | | | | ▲ | | | | | | | | |
| Aluminium EN 5754 (AlMg3) | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | | ▲ | | | | | | | | |
| Dimension: 1250 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Square holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | ▲ | | | | ▲ | | | | | | | | | |
| C 5.00 | U 16.00 | 9.8% | | | | | | | | | | ▲ | | | | | | | | | |
| C 8.00 | U 10.00 | 64.0% | | | | | | | | | | ▲ | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | | | | ▲ | ▲ | | | | | | | | |
| C 9.00 | U 34.00 | 7.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | ▲ | | | | ▲ | ▲ | | ▲ | | | | | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | | | | | ▲ | | | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| C 15.00 | U 20.00 | 56.3% | | | | | | | | | | ▲ | ▲ | | | | | | | | |
| C 20.00 | U 25.00 | 64.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 20.00 | U 50.00 | 16.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 25.00 | U 30.00 | 69.4% | | | | | | | | | | | ▲ | | | | | | | | |
| C 25.00 | U 35.00 | 51.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 25.00 | U 70.00 | 12.8% | | | | | | | | | | | ▲ | | | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 7.00 | 51.0% | | | | | | ▲ | | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | ▲ | | | | ▲ | | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | ▲ | | | | ▲ | | | | | | | | | |
| C 10.00 | U 14.00 | 51.0% | | | | | | ▲ | | | | ▲ | | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | ▲ | | | | ▲ | ▲ | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | | | | ▲ | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | | | | ▲ | | | | | | | | | |
| C 10.00 | U 12.00 | 69.4% | | | | | | | | | | ▲ | | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | ▲ | ▲ | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 1 side polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | ▲ | | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 2 sides polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | ▲ | | | | | | | | | |
| Aluminium EN 1050A (2S) | | | | | | | | | | | | | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | | | | | ▲ | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | | ▲ | ▲ | | | | | | | |
| C 25.00 | U 30.00 | 69.4% | | | | | | | | | | | ▲ | | | | | | | | |
| Aluminium EN 1050A (2S) + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 15.00 | U 60.00 | 6.3% | | | | | | | | | | | ▲ | | | | | | | | |
| C 20.00 | U 50.00 | 16.0% | | | | | | | | | | | ▲ | | | | | | | | |
| C 25.00 | U 70.00 | 12.8% | | | | | | | | | | | ▲ | | | | | | | | |
| Aluminium EN 5754 (AlMg3) | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | | | | | ▲ | | | | | | | | |
| Dimension: 1500 x 3000 mm | | | | | | | | | | | | | | | | | | | | | |
| Square holes Rectangular pitch | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| C 5.00 | U 8.00 | 39.1% | | | | | | | | | | ▲ | | | | | | | | | |
| C 8.00 | U 12.00 | 44.4% | | | | | | | | | | ▲ | ▲ | | | | | | | | |
| C 9.50 | U 13.33 | 50.8% | | | | | | | | | | ▲ | ▲ | | ▲ | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | ▲ | ▲ | | ▲ | | | | | | |
| C 15.00 | U 20.00 | 56.3% | | | | | | | | | | | ▲ | | | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | ▲ | ▲ | | | | | | | | |
| Aluminium EN 1050A (2S) | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 15.00 | 44.4% | | | | | | | | | | | ▲ | | | | | | | | |
| Aluminium EN 1050A (2S) + PVC | | | | | | | | | | | | | | | | | | | | | |
| C 10.00 | U 30.00 | 11.1% | | | | | | | | | | | ▲ | | | | | | | | |



RM Stock list 2010A

● = 1 day delivery
▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | | |
|--|--------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Round end slots Parallel pitch | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| LR 1.50 x 20.00 | U 3.00 x 24.00 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 2.00 x 20.00 | U 4.00 x 24.00 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 2.50 x 20.00 | U 5.00 x 24.00 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 4.00 x 13.00 | U 8.00 x 18.00 | 34.0% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 5.00 x 25.00 | U 8.00 x 32.00 | 47.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| LR 2.00 x 20.00 | U 4.00 x 24.00 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 3.00 x 20.00 | U 6.00 x 24.00 | 40.0% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 5.00 x 25.00 | U 8.00 x 32.00 | 47.0% | | | | | | | | | | ▲ | | | | | | | | | |
| Stainless steel EN 1.4404 (AISI 316L) | | | | | | | | | | | | | | | | | | | | | |
| LR 4.00 x 20.00 | U 8.00 x 24.00 | 40.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Round end slots Staggered pitch | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| LR 1.00 x 20.00 | Z 6.32 x 24.00 | 26.1% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 1.50 x 20.00 | Z 7.50 x 24.00 | 32.8% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 2.00 x 20.00 | Z 8.88 x 24.00 | 36.7% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 2.50 x 20.00 | Z 10.80 x 24.00 | 38.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 3.00 x 20.00 | Z 12.00 x 24.00 | 40.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 3.50 x 20.00 | Z 14.00 x 24.00 | 40.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 4.00 x 20.00 | Z 16.00 x 24.00 | 40.0% | | | | | | | ▲ | | | ▲ | | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| LR 1.00 x 10.00 | Z 7.00 x 14.00 | 20.0% | | | | | | | ▲ | | | | | | | | | | | | |
| LR 2.00 x 20.00 | Z 8.88 x 24.00 | 36.7% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 2.00 x 20.00 | Z 10.50 x 25.00 | 14.6% | | | | | | | | | | | ▲ | | | | | | | | |
| Stainless steel EN 1.4404 (AISI 316L) | | | | | | | | | | | | | | | | | | | | | |
| LR 2.00 x 20.00 | Z 8.88 x 24.00 | 36.7% | | | | | | | | | | ▲ | | | | | | | | | |
| Aluminium EN 5754 (AlMg3) | | | | | | | | | | | | | | | | | | | | | |
| LR 3.00 x 20.00 | Z 15.00 x 25.00 | 31.0% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 4.00 x 20.00 | Z 16.00 x 25.00 | 38.3% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 5.00 x 20.00 | Z 20.00 x 25.00 | 40.0% | | | | | | | | | | ▲ | | | | | | | | | |
| LR 5.00 x 25.00 | Z 24.00 x 32.00 | 31.0% | | | | | | | | | | | ▲ | | | ▲ | | | | | |
| LR 8.00 x 25.00 | Z 15.00 x 32.00 | 42.0% | | | | | | | | | | | | | | ▲ | | | | | |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Decorative patterns | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| Cross 19D | CPR 6.00 M 6.36 | 48.9% | | | | | | | ▲ | | | | | | | | | | | | |
| Club 1-005 | CPR 9.75 M 10.61 | 46.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Club Dec 2 | CPR 10.00 M 11.30 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Club 19C | CPR 10.00 M 11.30 | 49.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Club 1-020 | CPR 21.21 M 13.58 | 47.0% | | | | | | | ▲ | | | ▲ | | | | | | | | | |
| Club & Round 14D | CPRR 3.50 x 6.00 M 6.36 | 41.0% | | | | | | | ▲ | | | | | | | | | | | | |
| CPRR 3.50 x 6.00 | M 7.00 | 26.4% | | | | | | | ▲ | | | | | | | | | | | | |
| CPRR 5.00 x 9.75 | M 17.70 | 45.8% | | | | | | | ▲ | | | | | | | | | | | | |
| CPRR 5.00 x 11.00 | M 11.30 | 32.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Club & Round 1-006 | CPRR 6.00 x 9.75 M 15.00 | 43.0% | | | | | | | ▲ | | | ▲ | | | | | | | | | |
| Club & Round 9A | CPRR 6.00 x 11.00 M | 45.7% | | | | | | | ▲ | | | | | | | | | | | | |
| Cross 12E | CPS 15.00 M 15.60 | 45.3% | | | | | | | ▲ | | | | | | | | | | | | |
| Star 2-000 | CPS 15.30 M 15.60 | 43.6% | | | | | | | ▲ | | | ▲ | | | | | | | | | |
| Club 1-020 | CPR 12.21 M 13.58 | 47.0% | | | | | | | ▲ | | | | ▲ | | | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| Club 1-020 | CPR 12.21 M 13.58 | 47.0% | | | | | | | ▲ | | | | | | | | | | | | |
| CPRR 5.00 x 11.00 | M 11.30 | 32.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Dimension: 1250 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Decorative patterns | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| Club 1-020 | CPR 12.21 M13.58 | 47.0% | | | | | | | ▲ | | | ▲ | | | | | | | | | |
| Dimension: 669 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Perfocon | | | | | | | | | | | | | | | | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| RJ 0.20 | Z 2.50 x 1.60 | 3.0% | | | ▲ | | | | | | | | | | | | | | | | |
| Dimension: 250 x 700 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | | | | | | | | | | | | | | | | | | | |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| CDEM 16.00 | M 25.45 | 0.0% | | | | | | | | | | | ▲ | | | | | | | | |




RM Stock list 2010A

● = 1 day delivery

▲ = 10 day delivery

| Hole type & size (mm) | Pitch type & size (mm) | Open area | Thickness (mm) | | | | | | | | | | | | | | | | | | |
|--|-------------------------|-----------|----------------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Dimension: 250 x 800 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| CDEM 16.00 | M 25.45 | 0.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 250 x 1000 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| CDEM 16.00 | M 25.45 | 0.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 250 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| CDEM 16.00 | M 25.45 | 0.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 290 x 600 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| LREM 8.00 x 22.00 | U 44.00 | 0.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 290 x 700 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| LREM 8.00 x 22.00 | U 44.00 | 0.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Dimension: 1000 x 2000 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| Square Diagonal | CD7.50 M 11.50 | 43.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Deco Tresse Lattice | Dec 10.00 M 18.00 | 30.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Deco 45-000 Lattice | Dec 10.50 M 18.50 | 29.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Square Ornamental | Dec 8.00 U 11.00 | 49.0% | | | | | | | ▲ | | | | | | | | | | | | |
| DEC 10.00 | U 25.00 x 38.00 | 19.8% | | | | | | | ▲ | | | | | | | | | | | | |
| Deco 46-000 Lattice | Dec34.5 x 48.0Z55.0 x | 38.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Deco H3 Embossed | Spec 10.10 Spec 12.10 | 0.0% | | | | | | | ▲ | | | | | | | | | | | | |
| Anti Skid 4209-000 | RAS 5.00 x 8.10 M 17.68 | 20.0% | | | | | | | | | | | | ▲ | | | | | | | |
| Square Diagonal | CD 15.00 M 30.00 | 25.0% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| H 11.00 | T 14.00 | 64.3% | | | | | | | | | | | | ▲ | ▲ | | | | | | |
| Deco H3 Embossed | Spec 10.10 Spec 12.10 | 0.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Anti Skid 4209-000 | RAS 5.00 x 8.10 M 17.68 | 20.0% | | | | | | | | | | | | | ▲ | | | | | | |
| RAS 8.50 | M 35.30 | 6.4% | | | | | | | | | | | | | | ▲ | | | | | |
| RAS 11.00 x 10.00 | M 36.36 | 14.0% | | | | | | | | | | | | | | ▲ | | | | | |
| EM 8.00 x 12.00 | Z 13.25 x 20.00 | 0.0% | | | | | | | | | | | | | | ▲ | | | | | |
| CEM 12.00 x 12.00 | U 20.00 | 0.0% | | | | | | | | | | | | | ▲ | ▲ | | | | | |
| LREM 9.00 x 26.00 | U 52.00 | 0.0% | | | | | | | | | | | | | ▲ | ▲ | ▲ | ▲ | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| Square Diagonal | CD 15.00 M 30.00 | 25.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Anti Skid 4209-000 | RAS 5.00 x 8.10 M 17.68 | 20.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Embossed | LREM 9.00 x 26.00 U | 0.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Sendzimir galvanised (DX51D) | | | | | | | | | | | | | | | | | | | | | |
| DEC 3.80 x 6.60 | U 10.00 x 20.00 | 22.0% | | | | | | | | | | | | | | ▲ | | | | | |
| POLR 2.00 x 5.00 | Z 19.00 x 50.00 | % | | | | | | | | | | | | | ▲ | | | | | | |
| Anti Skid 4209-000 | RAS 5.00 x 8.10 M 17.68 | 20.0% | | | | | | | | | | | | | | | ▲ | | | | |
| CEM 12.00 x 12.00 | U 20.00 | 0.0% | | | | | | | | | | | | | | | ▲ | | | | |
| LREM 9.00 x 26.00 | U 52.00 | 0.0% | | | | | | | | | | | | | ▲ | ▲ | | | | | |
| Stainless steel EN 1.4301 (AISI 304) | | | | | | | | | | | | | | | | | | | | | |
| Square Diagonal | CD 15.00 M 30.00 | 25.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Anti Skid | RAS 5.00 x 8.10 M 17.68 | 20.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Embossed | LREM 9.00 x 26.00 U | 0.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Stainless steel EN 1.4301 (AISI 304) 2 sides polished grain 240 + PVC | | | | | | | | | | | | | | | | | | | | | |
| Square Diagonal | CD 15.00 M 30.00 | 25.0% | | | | | | | | | | | | | ▲ | | | | | | |
| Aluminium EN 1050A (2S) + PVC | | | | | | | | | | | | | | | | | | | | | |
| Square Diagonal | CD 15.00 M 30.00 | 25.0% | | | | | | | | | | | | | | ▲ | | | | | |
| Dimension: 1250 x 2500 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| CEM 12.00 x 12.00 | U 20.00 | 0.0% | | | | | | | | | | | | | ▲ | | | | | | |
| LREM 9.00 x 26.00 | U 52.00 | 0.0% | | | | | | | | | | | | | ▲ | ▲ | ▲ | ▲ | | | |
| Dimension: 1500 x 3000 mm | | | | | | | | | | | | | | | | | | | | | |
| Special patterns | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 1.0 | 1.2 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 4.5 | 5.0 | 6.0 | 8.0 | 10.0 |
| Mild steel | | | | | | | | | | | | | | | | | | | | | |
| RAS 8.50 | M 35.30 | 6.4% | | | | | | | | | | | | | | ▲ | | | | | |


Description of perforated sheet

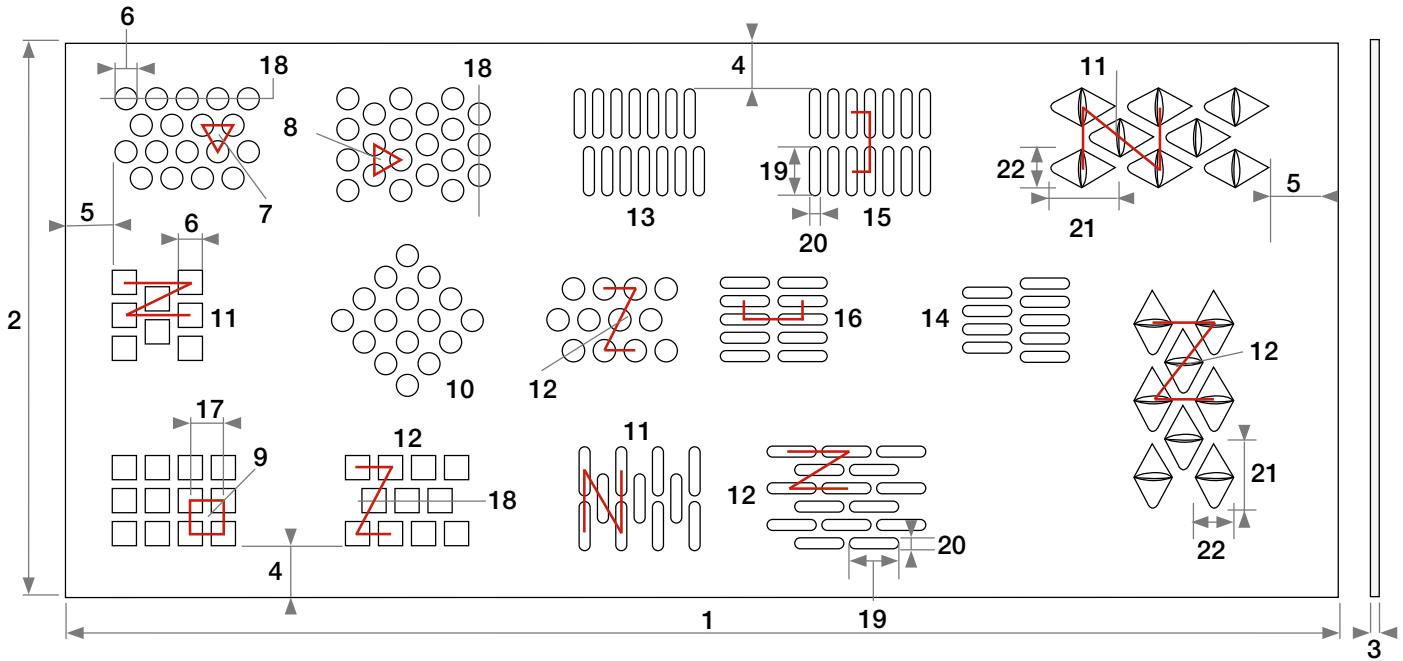


Hole form and arrangement

RMIG uses the international ISO norm 7806-1983(E) when describing hole shape and arrangement


Shape of holes:

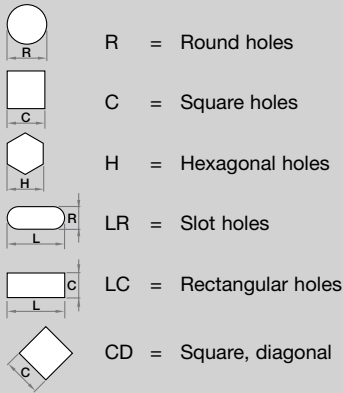

Arrangement of holes:

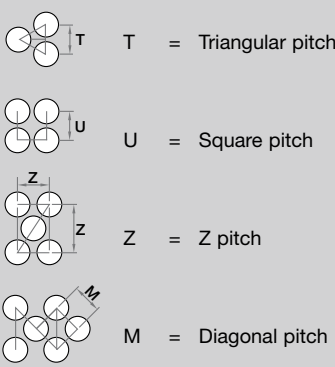

Examples:

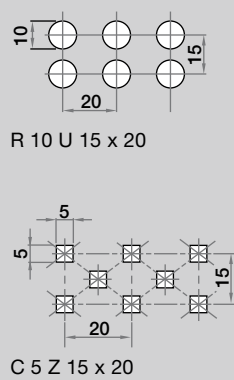


Guidance

- 1 Length
- 2 Width
- 3 Sheet thickness
- 4 Margins (long sides)
- 5 Margins (short sides)
- 6 Hole size
- 7 Triangular pitch, longitudinal
- 8 Triangular pitch, transverse
- 9 Square pitch
- 10 Diagonal pitch
- 11 Staggered parallel to width
- 12 Staggered parallel to length
- 13 End staggered parallel to width
- 14 End staggered parallel to length
- 15 Straight parallel to width
- 16 Straight parallel to length
- 17 Pitch
- 18 Row of holes
- 19 Slot hole length
- 20 Slot hole width
- 21 Nose screen length
- 22 Nose screen width


Margins

Fig. A

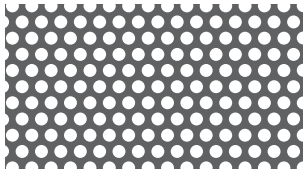


Perforated sheet without margins

Fig. B

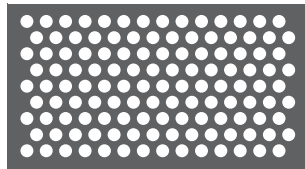

Perforated sheet with margins


Fig. C

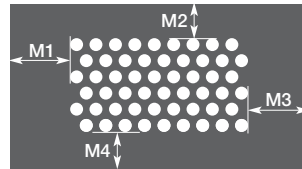


Perforated sheet with margins

Toolsettings


1.

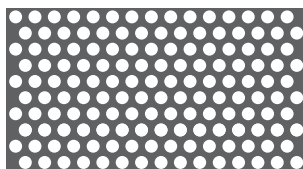

2.

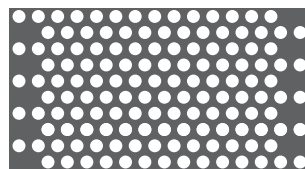


3.

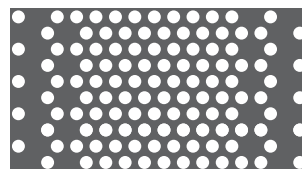



www.rmig.com

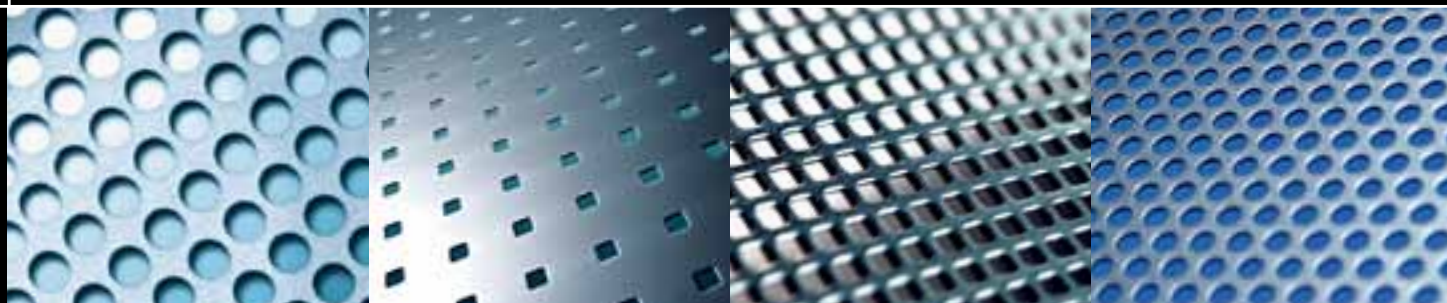

ORDER NOW FOR **IMMEDIATE DELIVERY**
CALL 01925 839644 or **VISIT** www.rmig.com



RMIG Ltd

Units 1-7 Adlington Court, Risley Road
Birchwood, Warrington, Cheshire WA3 6PL

Stock Sales 01925 839644

Production Sales 01925 839610

Email: info.uk@rmig.com

RMIG

Formerly Rich. Muller Limited

Perforation without limits